

TEST REPORT


Client: Brentano, Inc.
260 Holbrook Drive
Wheeling, IL 60090

Attention: Lan Chenh

E-Mail: lchenh@brentanofabrics.com

Sample Description as Declared :

Sample Description : Upholstery Fabric
Color : Testing Sample
Style # : 4705
PO# : DES2515
Fabric/Garment Weight : Not Provided
Fiber Content : 96% Wool / 8% Nylon
No. of Samples : 2
End Use : Upholstery
Finish : Not Provided
Care Instructions : Not Provided
Sample Received Date : November 27, 2019
Final Confirmation Received Date : November 27, 2019
Report Completion Date : December 6, 2019

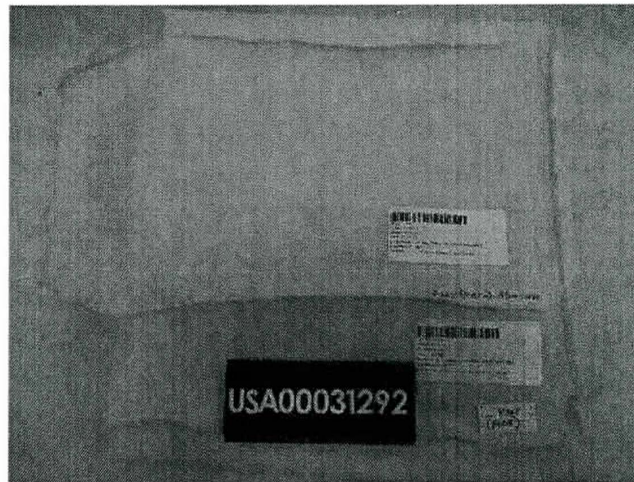

For and on behalf of
Intertek Products Group North America:

Digitally signed by
Rita Pun
Date: 2019.12.06
15:29:37 -06'00'

TEST RESULTS:

CA TB 117:2013 – Smolder Resistance of Materials used in Upholstered Furniture
-Section 1: Cover Fabric Test

Component Description: Woven Upholstery Fabric – Style: 4705			
Initial Test			
	Vertical Char length (Inches)	Mock-up specimen continues to smolder After 45 Minutes	Mock-up test specimen transitions to open flaming
Specimen 1	0.5	No	No
Specimen 2	0.6	No	No
Specimen 3	0.6	No	No

Requirements: A cover fabric material considered pass or fail based on following criteria

1. A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
 - a) The mock-up test specimen continues to smolder after 45 minutes test duration.
 - b) A vertical Char length (measured as specified in step 11.9 of ASTM E1353-08a^{e1}) of more than 1.8 inches (45 mm) develops on the cover fabric.
 - c) The mock-up test specimen transitions to open flaming.
- 2 The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and the mock-ups are no longer smoldering.
- 3 If more than one initial specimen fails, the cover fabric fails the test.
- 4 If any one of the three initial specimens fails, repeat the test on additional three specimens.
- 5 If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Note: For Cover fabrics that pass this section, the first layer of filling materials located below the cover fabric shall also meet the test requirements of section 3 of CA TB -117 :2013

Conclusion: The cover fabric material submitted **does meet** the flame resistance requirements when tested in accordance with the Bureau of Electronic & Appliance Repair Home Furnishings and Thermal Insulation, Technical Bulletin 117 – 2013, Section 1: Cover fabric test